

- N15F Brass Body with SUS Tip Size 0.15mm | Capacity 46cc/min @ 70bar
- N20F Brass Body with SUS Tip Size 0.2mm | Capacity 89cc/min @ 70bar
- I30F Brass Body with SUS Tip Size 0.3mm | Capacity 145cc/min @ 70bar
- N40F Zinc Body with SUS Tip Size 0.4mm | Capacity 178cc/min @ 70bar

## Mist Spraying Nozzles Data Sheet

Operating Pressure		Flow Rate (C.C. /min)						
PSI	Kg/cm <sup>2</sup>	#15	#20	#30	#40	#50	#60	#80
100	7	X	X	X	56	77	101	138
200	14	X	X	65	80	109	143	195
300	21	X	49	80	98	134	175	238
400	28	29	56	92	113	154	202	275
500	35	33	63	103	126	172	226	308
600	42	36	69	113	138	189	248	337
700	49	38	74	122	149	204	267	364
800	56	41	80	130	159	218	286	389
900	63	44	84	138	169	231	303	413
1,000	70	46	89	145	178	243	319	435

Operating Pressure		28 kg/cm <sup>2</sup>
Tip Number	Distance (Meter)	Flow Rate (C.C. /min)
20	2.0	56
30	2.5	92
40	2.5	113
50	2.5	154
60	2.5	202
80	2.5	275

Operating Pressure		70 kg/cm <sup>2</sup>
Tip Number	Distance (Meter)	Flow Rate (C.C. /min)
20	3.0	89
30	4.0	145
40	4.0	178
50	4.0	243
60	4.0	319
80	4.0	435



### 噴嘴系列 Fog nozzle


圖號 Fig.	品名 Description	編號 Item No				
①	不銹鋼 Stainless steel	I 20	I 30	I 40	I 50	I 60
②	瓷片 Ceramic	I 20C	I 30C	I 40C	I 50C	I 60C
③	加濾網 (不銹鋼)	I 20F	I 30F	I 40F	I 50F	I 60F
	With filter (瓷片)	I 20CF	I 30CF	I 40CF	I 50CF	I 60CF
□ 徑 DIA(mm)		0.2	0.3	0.4	0.5	0.6



### 迴轉噴頭系列 Rotary nozzle

圖號 Fig.	編號 Item No	品名 Description	角度 Angle	□ 徑 DIA(mm)
①	R 600	迴轉噴頭 Rotary nozzle	360°	0.3~0.6
	R 3000			0.8~1.3
②	R 201			0.8~1.8
③	R 202			0.4~1.0
	R 402			0.4/10~0.5/1.5
	R 802			0.5/1.0~0.5/1.5
	R 211	180°	0.4~1.0	
④	I 2000	噴霧嘴 Spray nozzle	I 桿 I type	0.8~1.8
⑤	Y 2000		Y 桿 Y type	

### 噴霧範圍及粒徑表 Spraying range/Average diameter droplets

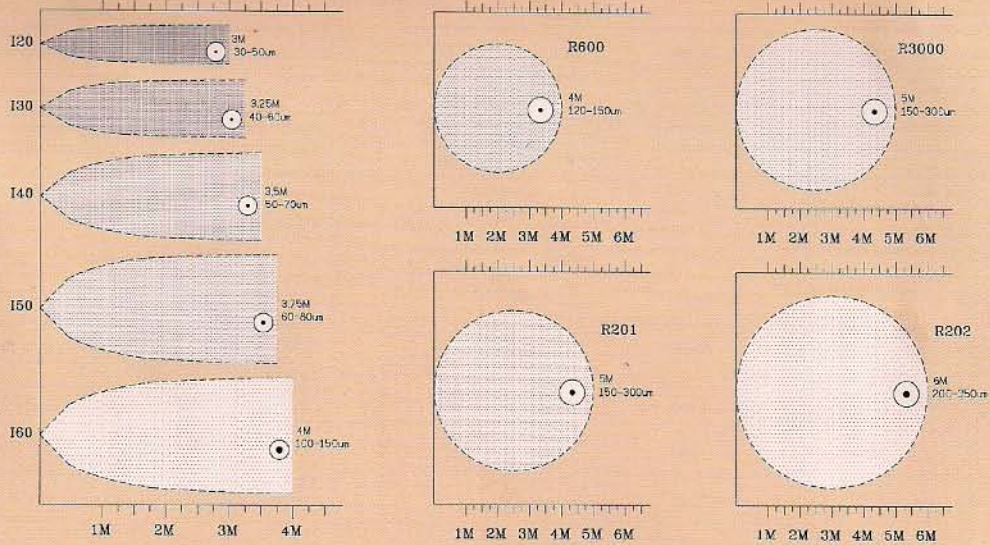

### 噴霧壓力/水量表 Spraying pressure flow volume

