










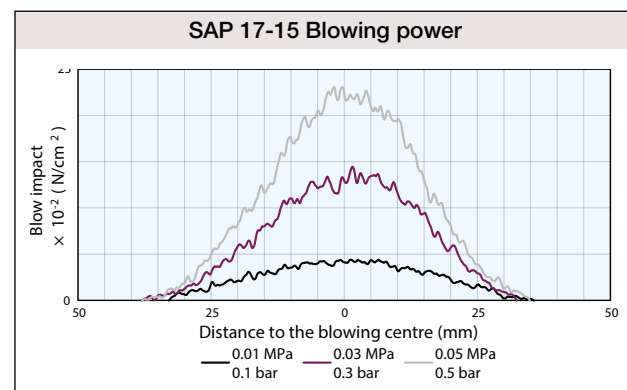
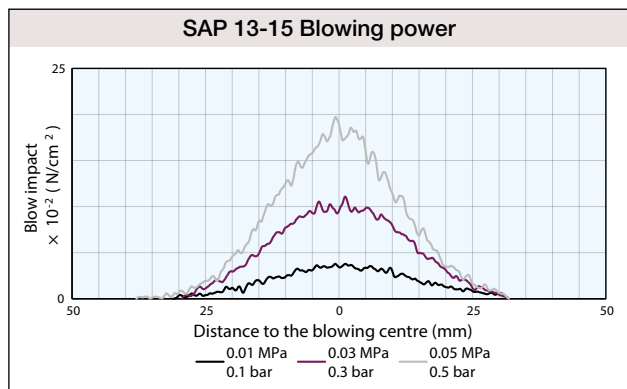


- Very compact air nozzle, model made of stainless steel S304 with great resistance to temperature, abrasion and corrosion.
- Designed for a minimum pressure loss that improves impact and reduces consumption.
- Large blow coverage area compared to standard nozzle thanks to the head design.
- Suitable for tight spaces.

 <b>Material</b> S304	 <b>Pressure</b> 0.1 MPa ca. 1 bar	 <b>Maximum temperature</b> 400 °C
 <b>Thread connection</b> 1/8"-1/4" male	 <b>Weight</b> 10 - 16 g	 <b>Strength of blowing</b> 1.9 - 2.3 N (0.05 MPa - ca. 0.5 bar)
 <b>Air consumption</b> 275-365 l/min (0.05 MPa - ca. 0.5 bar)	 <b>Level of noise</b> 78-79 dB(A) (0.05 MPa - ca. 0.5 bar)	 <b>Product code</b> 1/8M SAP 13-15 S304 1/4M SAP 17-15 S304

**Dimensions**

Pipe conn. size	Dimensions (mm)							Mass (g)
	L1	L2	L3	l1	l2	H	N	
1/8M	29	13	14.7	1.5	13	12	7	10
1/4M	37	17.5	18.9	1.5	17	14	10.5	16



Pipe conn. size	Air consumption (l / min, Normal)				
	0.01 MPa	0.02 MPa	0.03 MPa	0.04 MPa	0.05 MPa
1/8M	120	170	208	239	266
1/4M	167	235	287	330	368

Air compressor can be used.  
(The table above shows the air consumption)