




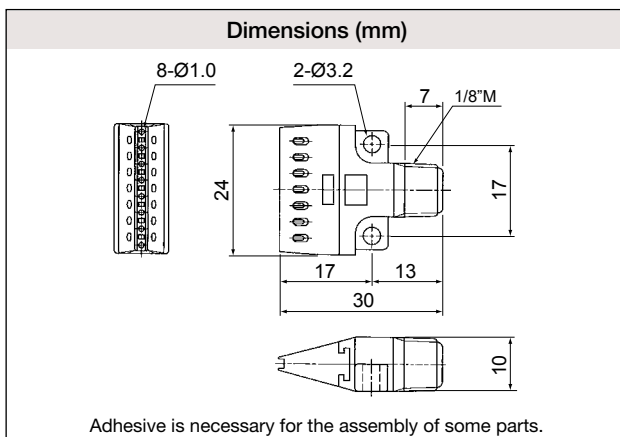


- Air booster nozzle appropriate for applications where flat blowing is required in hard to reach areas or tight spaces. High blowing power through its 8 orifices which generate an effective flat blow.
- Lightweight and ultra-compact design.
- Uniform distribution of the blow in multi-nozzle assemblies thanks to its interior design.
- Its multi-orifice design prevents clogging, not exceeding 2.1 bar of static pressure, according to safety regulations.
- Manufactured in PPS by injection, they provide high resistance to chemical aggressions and good resistance to high temperature.
- Suitable for environments where hygiene is crucial.

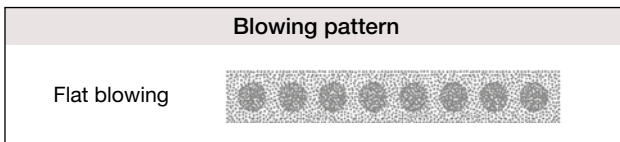

- Material**
PPS
- Pressure**
0.7 MPa
ca. 7 bar
- Maximum temperature**
120 °C
- Thread connection**
1/8" male
- Weight**
4 g
- Strength of blowing***
3.21 N
- Air consumption***
340 l/min,
Normal
- Level of noise***
82 dB(A)
- Product code**
1/8M TF-F 24-8-010 PPS-IN

* at 0.5 MPa (ca. 5 bar)

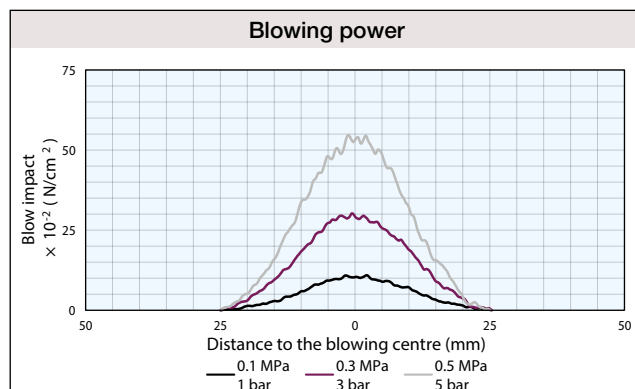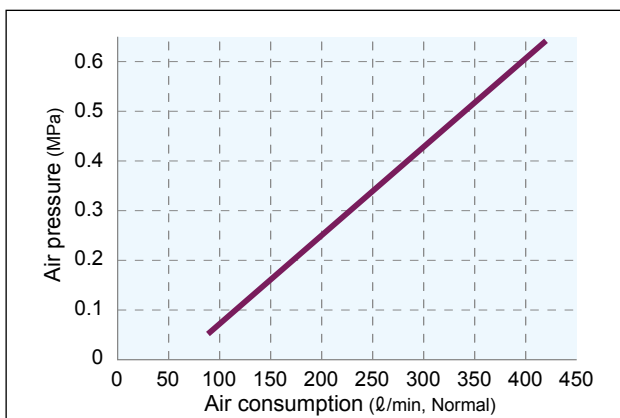

Consumption (l/min, Normal)

0.1 MPa	0.3 MPa	0.5 MPa
115	225	340