


UNI-SPRAY NOZZLE TIPS: SPRAY NOZZLE COVERAGE

- ◀ **Flat Spray Nozzle:** High-impinging spray, excellent for cleaning, rinsing and sometimes phosphating.
- ◀ **Hollow Cone Nozzle:** Lower-impinging spray used where high surface coverage is required, such as in the zinc phosphate stage.
- ◀ **Full Cone Nozzle:** Used where full stationary coverage is required.
- ◀ **Flooding Nozzle:** Used where high flow rates are required, such as in the final rinse to eliminate solution carry-over.
- ◀ **Threaded Ball Connection:** Has NPT or BSP female threads for attaching the nozzle of your choice.

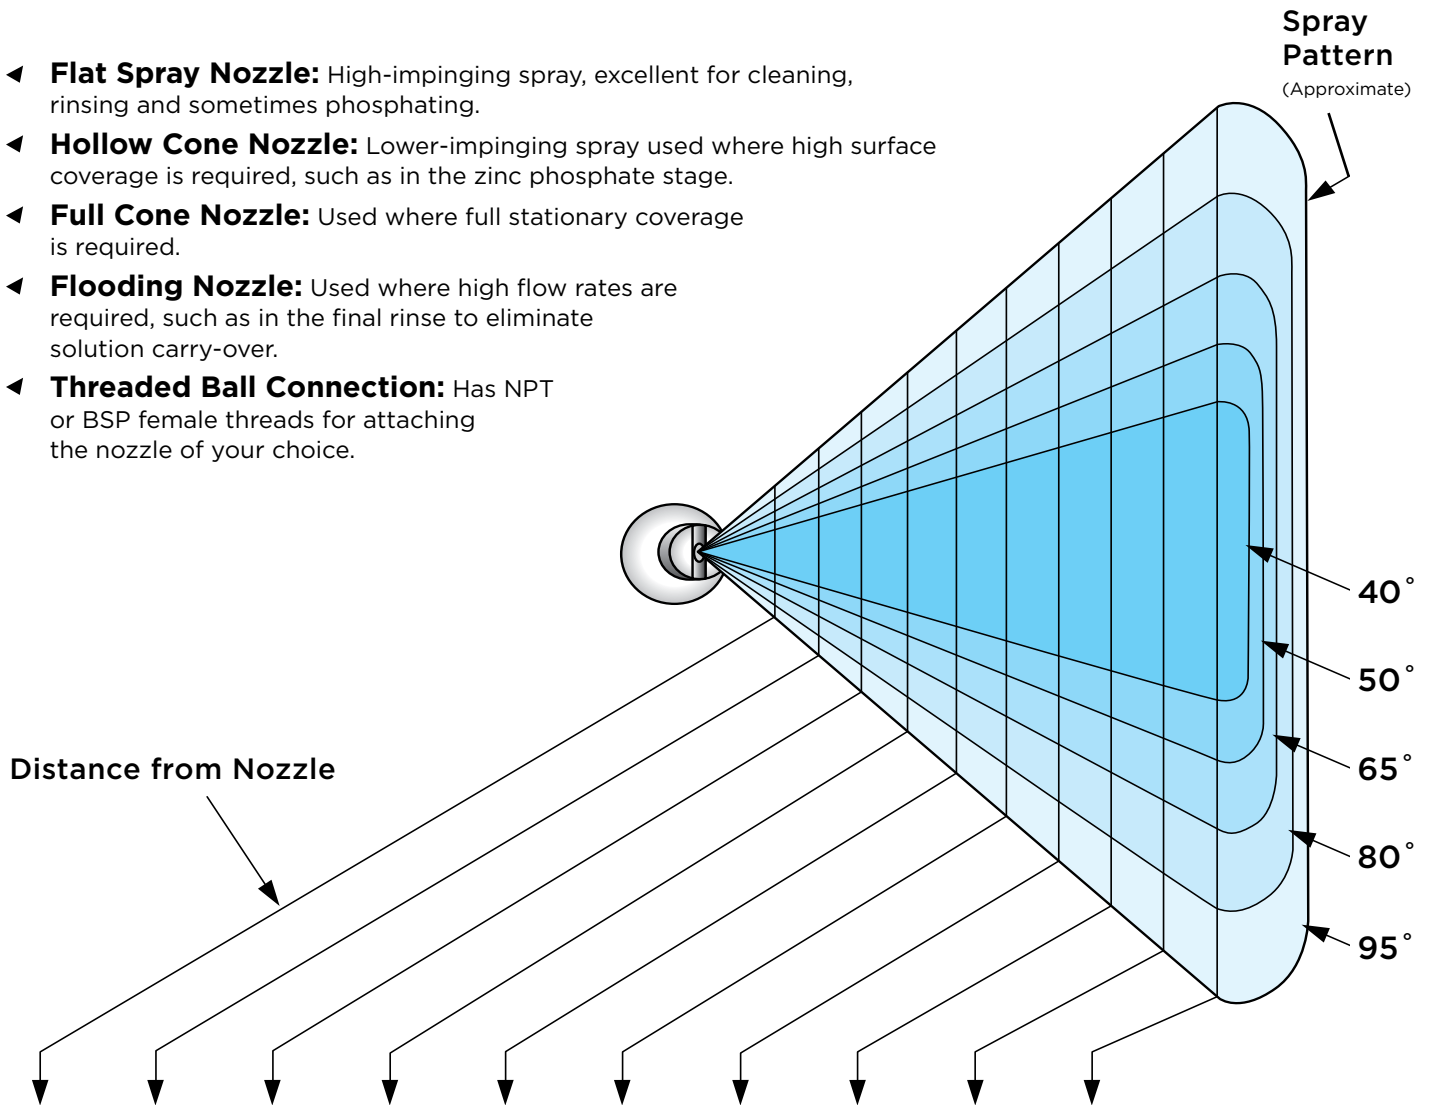

HEIGHT OF INCLUDED ANGLE OF SPRAY COVERAGE (CM)

10 cm	15 cm	20 cm	25 cm	30 cm	40 cm	50 cm	60 cm	75 cm	90 cm	@ Spray Angle
7.6	11.4	14.5	18.2	21.7	29.1	36.4	43.7	54.5	65.5	40°
9.4	14.2	18.8	23.2	28.0	37.3	46.7	56.0	70.0	84.1	50°
12.4	19.1	25.5	31.7	38.2	51.2	63.6	76.2	95.5	114.6	65°
17.0	25.4	33.5	42.0	50.5	67.2	84.2	100.7	126.0	151.1	80°
21.8	33.0	43.8	54.5	65.5	87.5	109.2	131.0	163.7	196.6	95°